


喇叭头双线程干壁钉 Bugle Head Double Thread Drywall Screw DIN 18182-2 (TN) - 2019

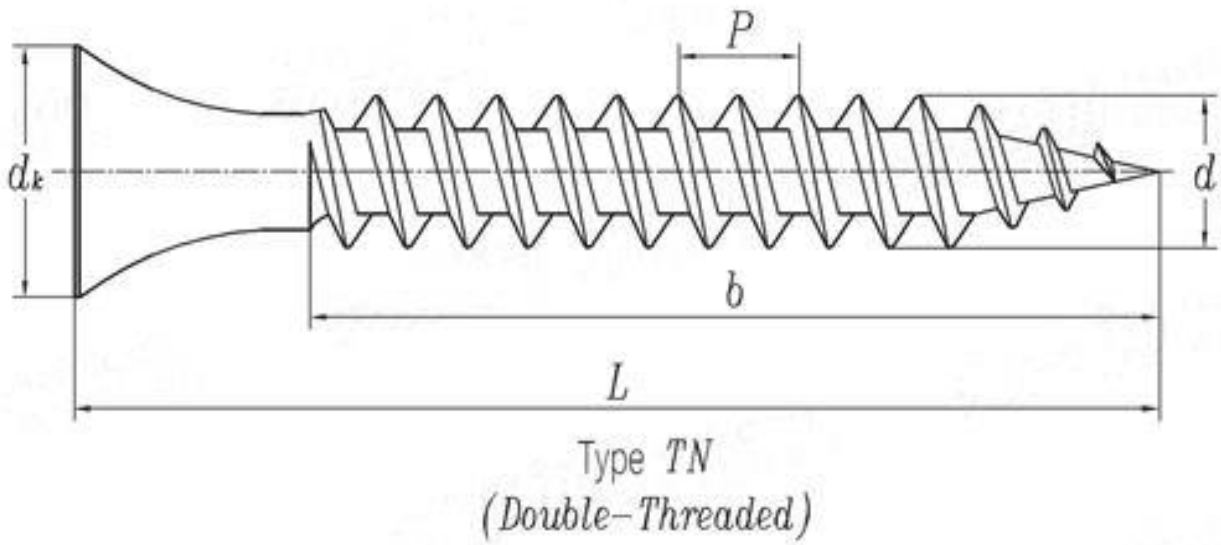

| 螺纹规格 Thread Specification | | 3.5 | 4 | 4.3 |
|---------------------------|---------|------|------|------|
| d | | | | |
| d | 最大值 Max | 3.7 | 4 | 4.3 |
| | 最小值 Min | 3.4 | 3.7 | 4 |
| dk | 最大值 Max | 8.5 | 8.5 | 8.5 |
| | 最小值 Min | 8.14 | 8.14 | 8.14 |